
## **Phone Docking Cradle - S-Type**


## FITTING THE DOCKING CRADLE

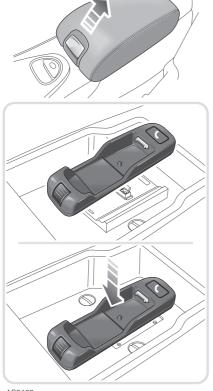

AS0109

- 1. Lift the top of the cubby box.
- 2. Align the connector on the docking cradle with the one on the base plate.
- 3. Push the docking cradle onto the base plate. A 'click' will be heard to indicate that the docking cradle is secured to the base plate.
- 4. Lower the top of the cubby box.

## REMOVING THE DOCKING CRADLE



- 1. Lift the top of the cubby box.
- 2. Rotate 2 turnbuckles 90° anti-clockwise and withdraw the base plate from the cubby box.
- 3. Press the release button on the underside of the base plate to release the cradle.
- **4.** Pull the docking cradle from the base plate to remove.
- **5.** Refit base plate and secure with turnbuckles.
- 6. Lower the top of the cubby box.