

## METHYL TERTIARY BUTYL ETHER (MTBE)

Unleaded fuel containing an oxygenate known as MTBE can be used provided that the ratio of MTBE to conventional fuel does not exceed 15%. MTBE is an Ether based compound derived from Petroleum, which has been specified by several refiners as the substance to enhance the Octane rating of fuel.

## RUNNING OUT OF FUEL


⚠ Avoid running out of fuel. Doing so can cause damage to the vehicle's engine, fuel and emission control systems.

**Note:** *If the vehicle does run out of fuel, a minimum of 4 litres (0.9 gallons) will be required to restart the engine. The vehicle will need to be driven 1.6-5 km (1-3 miles) in order to reset the engine management and monitoring systems.*

**Note:** *If the vehicle does run out of fuel, seeking qualified assistance is advisable.*

## REFUELLING

- ⚠ Take note of all warnings and instruction given on the label affixed to the inside of the filler flap.
- ⚠ When refuelling ensure that all windows, doors, and sunroof are fully closed, particularly if young children or animals are in the vehicle.
- ⚠ Do not attempt to fill the tank to its maximum capacity. If the vehicle is to be parked on a slope, in direct sunlight or high ambient temperature, expansion of the fuel could cause spillage.
- ⚠ Check the fuel pump information carefully, to ensure that you are putting the correct fuel into the vehicle.
- ⚠ If the vehicle is filled with incorrect fuel, it is essential that you seek qualified assistance before you start the engine.

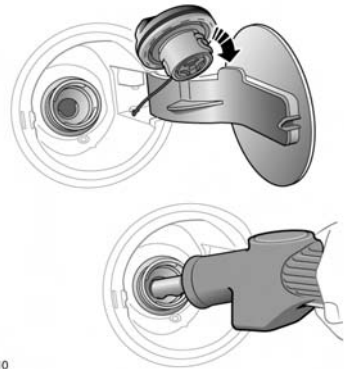

SJ1710

The vehicle must be unlocked using the Smart Key, before the filler flap can be opened.

1. Press the fuel filler flap release switch, see **202, DRIVER CONTROLS**.
2. Pull the flap open.
3. Twist the cap anticlockwise to undo.