


# Fluid level checks

## OPENING THE BONNET

- ⚠ Do not attempt to open the bonnet if the pedestrian protection system has deployed.

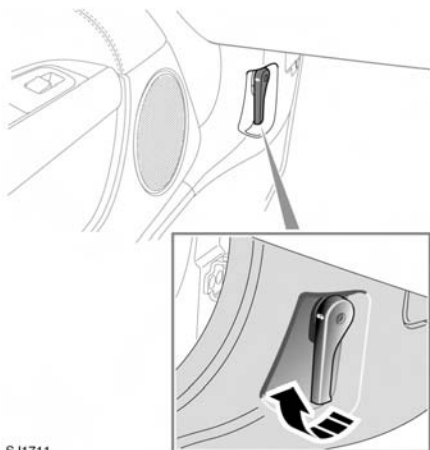

SJ1711

1. Pull the bonnet release handle located in the left-hand front footwell.
  2. Reach across to the centre rear edge of the bonnet and lift. The gas filled struts will assist raising the bonnet and retain it in the fully open position.
2. Check that both catches are fully engaged by attempting to lift both sides of the bonnet. This should be free from all movement.

## CLOSING THE BONNET

- ⚠ **Before closing the bonnet ensure that no one is obstructing the closing area and that hands and clothes are clear.**

- ⚠ **Do not drive with the bonnet retained by the safety catch alone.**

1. Lower the bonnet to within a distance of 300 to 350 mm (12 to 14 ins) of the fully closed position, then release and allow the bonnet to shut.