


Fluid level checks

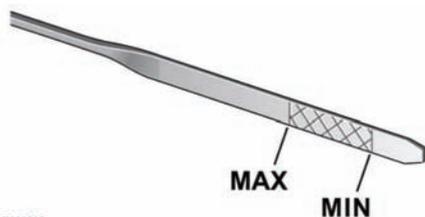

E144247

1. Withdraw the dipstick and wipe the blade clean with a lint free cloth.
2. Fully re-insert the dipstick and withdraw again to check the oil level. Never allow the oil level to fall below the lower mark (MIN) on the dipstick.

As a general guide, if the level on the dipstick:

- Is nearer to the upper mark or notch than the lower, add no oil.
- Is nearer to the lower mark than the upper, add 0.5 litre (1 pint) of oil.
- Is below the lower mark, add 0.8 litre (1.4 pints) of oil and re-check the level after a further 5 minutes.

TOPPING UP THE OIL

- ⚠ Failure to use an oil that meets the required specification could cause excessive engine wear, a build up of sludge and deposits, and increase pollution. It could also lead to engine failure. Do not use low quality or obsolete oils.
- ⚠ Your vehicle warranty may be invalidated if damage is caused by using oil that does not meet the required specification.

- ⚠ Overfilling with oil could result in severe engine damage. Oil should be added in small quantities and the level re-checked to ensure that the engine is not overfilled.
- ⚠ Do not use oil additives of any type as engine damage could occur. Use only specified lubricants.

All except 2.0 litre petrol engine

1. Unscrew the oil filler cap.
2. Add oil as indicated by the message centre display.
3. Wait 5 minutes for the oil level to stabilise then re-check.

2.0 litre petrol engine

1. Unscrew the oil filler cap.
2. Add oil as indicated by the level on the dipstick, see **165, CHECKING THE ENGINE OIL LEVEL**.
3. Wait 5 minutes for the oil level to stabilise then re-check.

It is essential to use the correct specification oil, and to ensure it is suitable for the climatic conditions in which the vehicle is to be operated, see **171, LUBRICANTS AND FLUIDS**.

Jaguar recommends:

Castrol EDGE Professional



CHECKING THE COOLANT LEVEL

- ⚠ Running the engine without coolant will cause serious engine damage.
- ⚠ If persistent coolant loss is noticed, seek qualified assistance immediately.