
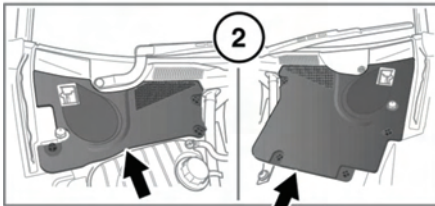


closed position, then release and allow the bonnet to shut.

2. Check that both catches are fully engaged by attempting to lift both sides of the rear outer edge of the bonnet. This should be free from all movement.

UNDER BONNET COVERS - REMOVAL

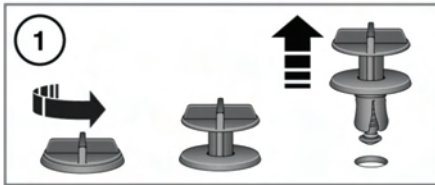

E150717

1. Rotate the turnbuckle screws counter-clockwise, then pull to remove the turnbuckles securing the cover.
2. Lift the front edge of the cover and slide forwards to remove.

UNDER BONNET COVERS - REFITTING

- ⚠ Before refitting the underbonnet covers, ensure that no pipes, cables or other items, have been trapped between the cover and casing.

1. Place the cover over the casing and make sure the holes are aligned.
2. Press the cover down firmly and push the turnbuckles through the cover and casing. Rotate the turnbuckle screws clockwise to tighten.

UNBLOCKING WASHER JETS

- ⚠ **Do not operate the washer jets during adjustment. Windscreen washer fluid may cause irritation to the eyes and skin. Always read and observe the washer fluid manufacturers instructions.**

If a washer jet becomes blocked, use a thin strand of wire to unblock the jet by inserting the wire into the jet. Ensure that the wire is completely removed after unblocking.

CHANGING A BULB

Read the following Warnings and Cautions before changing a bulb.

- ⚠ **Always find a safe place to stop, off the highway and away from traffic.**
- ⚠ **Apply the parking brake and engage Park (P).**
- ⚠ **Make sure that all passengers and animals are out of the vehicle and in a safe place, away from the highway.**
- ⚠ **Place a warning triangle at a suitable distance behind the vehicle, facing towards oncoming traffic.**