






Care should be taken when manually closing and engaging the latch as the soft-close feature will automatically close the latch. Possible injury may occur.

To activate the soft-close feature, lower the luggage compartment lid or tailgate onto the latch. It will then automatically move to the fully closed and latched position.

### Roof luggage:

Jaguar branded cross bars are required for fitting all roof carrying equipment. The roof load must not exceed 75 kg (165 lb).

## OPENING AND CLOSING THE POWERED TAILGATE

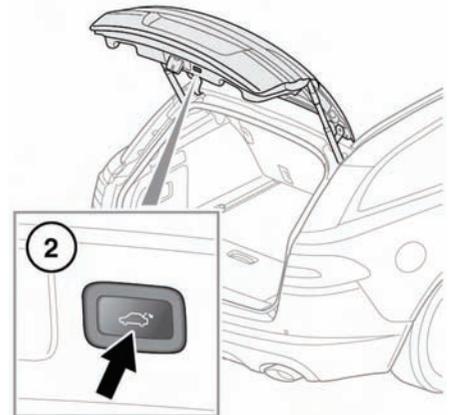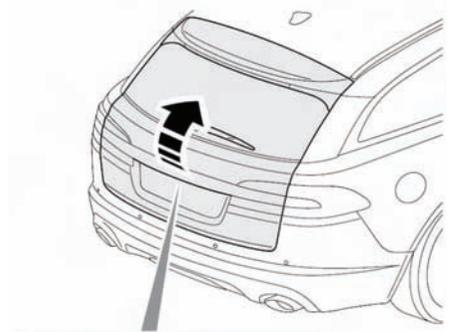

E152065



Make sure there is a minimum space of 1.0 m (39 in) above the rear of the vehicle before operating the tailgate. Insufficient space may result in damage to the vehicle.