




Care should be taken when manually closing and engaging the latch as the soft-close feature will automatically close the latch. Possible injury may occur.

To activate the soft-close feature, lower the luggage compartment lid or tailgate onto the latch. It will then automatically move to the fully closed and latched position.

Roof luggage:

Jaguar branded cross bars are required for fitting all roof carrying equipment. The roof load must not exceed 75 kg (165 lb).

OPENING AND CLOSING THE POWERED TAILGATE

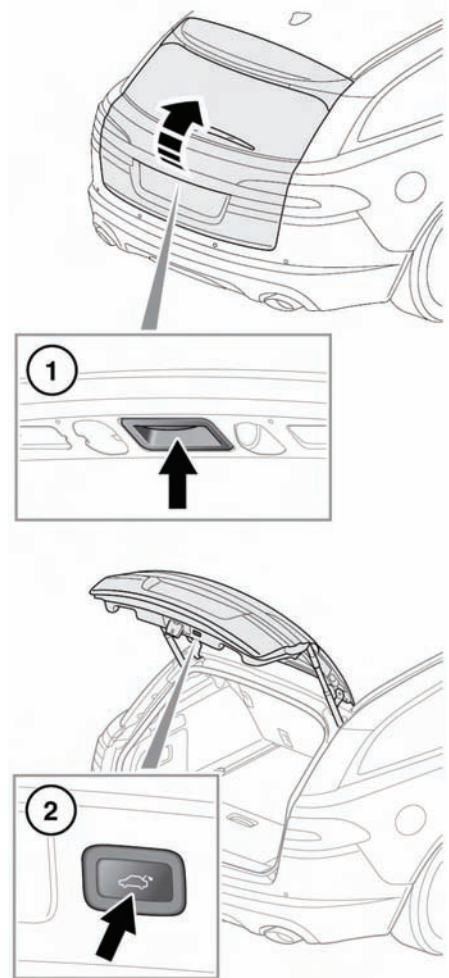

E152085



Make sure there is a minimum space of 1.0 m (39 in) above the rear of the vehicle before operating the tailgate. Insufficient space may result in damage to the vehicle.