

## NOTICE

*Overfilling with oil could result in severe engine damage. Oil should be added in small quantities and the level rechecked to make sure that the engine is not overfilled.*

## NOTICE

*Do not use oil additives, of any type as engine damage could occur. Use only specified lubricants.*

1. Unscrew the oil filler cap.
2. Add oil, as indicated by the Message center display.
3. Wait 5 minutes for the oil level to stabilize, and then recheck.


It is essential to use the correct specification oil, and to make sure it is suitable for the climatic conditions in which the vehicle is to be operated. See **217, LUBRICANTS AND FLUIDS**.

Jaguar recommends:

**Castrol EDGE Professional**



## CHECKING THE COOLANT LEVEL

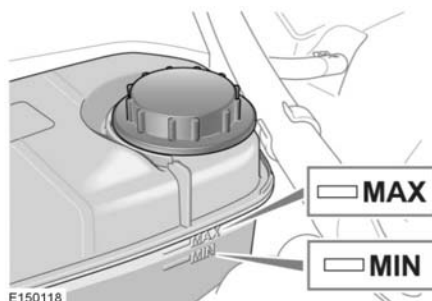

## NOTICE

*Running the engine without coolant will cause serious engine damage.*

## NOTICE

*If persistent coolant loss is noticed, seek qualified assistance immediately.*

The coolant level in the expansion tank should be checked at least weekly (more frequently in high mileage or severe operating conditions). Always check the level when the system is cold.

Make sure the coolant level is maintained between the maximum and minimum level indicator marks, as illustrated.

If coolant/steam is expelled from the pressure cap, or the level has dropped suddenly, or by a large amount, arrange for the vehicle to be examined by a qualified technician as soon as possible.

If the message **LOW COOLANT LEVEL** is displayed in the Message center, stop the vehicle as soon as safety permits and top up the coolant reservoir with the recommended antifreeze/water mix.