


## LIGHTING CONTROL



E132401

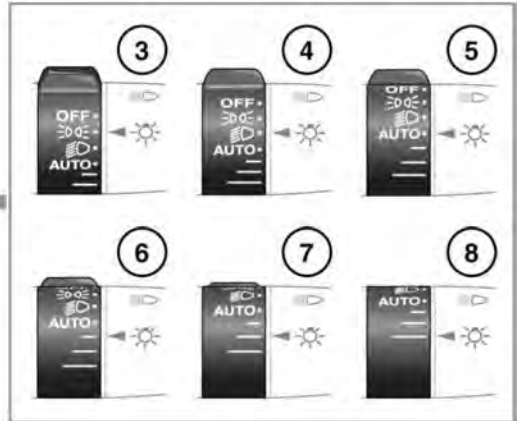

1. With the headlamps on, push the switch away from the steering wheel to select high beam. The blue warning indicator in the Instrument panel will illuminate.
2. Pull the switch towards the steering wheel and release to flash the high beam on and off. The high beam will remain on for as long as the switch is held.
3. Side lamps.
4. Low beam.
5. **AUTO**: When ambient light fades, the side lamps and headlamps will switch on automatically.
6. Exit delay of 30 seconds.
7. Exit delay of 60 seconds.
8. Exit delay of 120 seconds.

**Note:** If the rotary control is in the **AUTO** position there will be no exit delay and the headlamps will extinguish when the ignition system is switched off.

Press the headlamp button on the Smart key to switch off the headlamps during an exit delay period.

If the rotary control is moved to the **OFF** position, with high beam still activated, both low and high beam will be extinguished. Both low and high beam will illuminate when the headlamps are switched on again.

## DAYTIME RUNNING LAMPS

With the rotary control in the **OFF** or **AUTO** position, the front Daylight running lamps will switch on automatically with the following conditions:

- The ignition is on.
- The engine is running.
- The gear selector is in Drive (**D**) or Reverse (**R**) - market dependent.

# Exterior lights

**Note:** The lamps remain on if the gear selector is subsequently moved to Neutral (N).

- The Electric Parking Brake (EPB) is not applied (is released) - market dependent.

## APPROACH LAMPS

The headlamps can be illuminated remotely for a programmed length of time, by pressing the headlamp button on the Smart key. See **4**, **UNLOCKING THE VEHICLE**. Press the button again to switch off.

## ADAPTIVE FRONT LIGHTING SYSTEM (AFS)

Adaptive front lighting is designed to give the driver improved visibility, using a swivelling headlamp unit, a static bending lamp and a cornering lamp. These lamps broaden the beam of the headlamps when cornering in different circumstances.

The headlamp unit swivels accordingly when cornering, to improve light spread on bends in the road.

**Static bending lamps:** The static bending lamps operate when necessary, to provide an even broader light spread.

**Cornering lamps:** At speeds up to 40 km/h (25 mph), to provide improved visibility at junctions, the system switches on the lamp if it has received an input from the vehicle's direction indicator. Only the lamp on the same side as the operating indicator illuminates. The lamp will self cancel after 3 minutes of continuous operation.

## WINDSCREEN WIPER DETECTION

This function only operates when **AUTO** is selected. The side lamps, tail lamps and headlamps will switch on automatically if the windscreen wipers are switched on for 20 seconds or more. Once the windscreen wipers are switched off, the side lamps and headlamps will automatically switch off 2 minutes later.

## AUTO HIGH BEAM

This feature automatically selects and deselects high beam, under specific conditions of road lighting and in the absence of other vehicle's lights. The system is only active when the ambient light drops below a predetermined level.

This function is only active if the rotary control is in the **AUTO** position and the lighting control is in the central position.

The system will only activate when the vehicle's speed exceeds 40 km/h (25 mph). The system will deactivate when the vehicle's speed drops below 24 km/h (15 mph).

**Note:** Auto high beam does not operate when Reverse (R) gear is selected.

To manually select high beam, move the lighting control to the high beam position, as normal. To return to Auto high beam, move the lighting control back to the central position.

To manually override to low beam from high beam, pull the lighting control to the flash position and Auto high beam will be cancelled. To return to Auto high beam, push the lighting control to the high beam position and then return it to the central position.

When Auto high beam is enabled, the system indicator will illuminate, see **47**, **AUTO HIGH BEAM (GREEN)**.

**Note:** Make sure that the sensor in the rear-view mirror is not blocked or obstructed.

The following may also affect the operation of Auto high beam:

- Highly reflective road signs.
- Dimly lit road users, for example, cyclists and pedestrians.
- Adverse weather conditions, for example, fog, heavy rain and snow.
- Dirty or obscured sensor.
- Dirty, damaged, or misted windscreen.
- Oncoming vehicles partially obscured by a central road barrier.
- An icy or frosted windscreen.

**Note:** *Make sure to defrost the windscreen during winter conditions.*

To switch off Auto high beam, turn the rotary control from **AUTO** to headlamps on.

The Auto high beam feature can be disabled/enabled using the **Driving Features** menu, **41**, **INSTRUMENT PANEL MENU**.

## HEADLAMPS - DRIVING ABROAD

No mechanical adjustment is required or the need for any external obscuration decals.

These headlamps are fully compliant with current homologation requirements in all ECE countries.

## HEADLAMPS - CONDENSATION

In certain circumstances, misting may occur on the inside of a lamp lens. This is caused by natural changes in environmental conditions.

This misting is not detrimental to lamp performance and will clear during normal usage.