


## Using the Quick Access menu

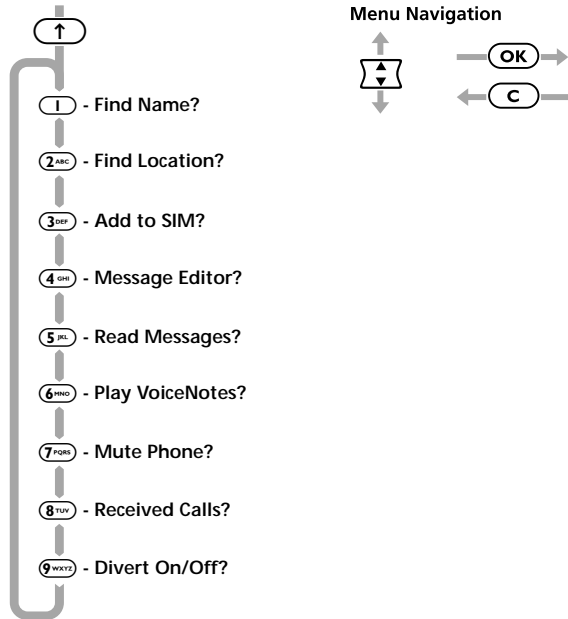

The menu shown above represents the default setting supplied with your phone.

Although the features in your phone are available through easy access menus, some of the most commonly used features are also available in the Quick Access menu. Each feature in the menu is allocated a number from 1 to 9.

To use a Quick Access feature, you can use any of the following methods:

- Press the quick access key ( ) and say the Voice Tag name after the tone. For best results, use in an area with minimal wind or background noise. See **Using Voice Activation** on page 8-2.
- Press followed by the number of the feature.
- Press . Use to highlight the appropriate menu option and then press to select it.

You can change the features, and the positions of the features, available in the Quick Access menu – see **Customising the Quick Access menu** on page 10-4.

Each Quick Access feature is represented by an icon as well as the feature name. The currently selected icon is shown with a dark background.

### Find Name?

You will be prompted to Enter Name. Enter the first three characters of the name and press . The first matching entry in the Phone Book will be displayed. Press to call the number.

## 10-2 Handset quick access menu

---

### Find Location?

You will be prompted to Enter Location. Enter the location number and press **OK**. The first matching entry in the Phone Book will be displayed. Press **Call** to call the number.

### Add to SIM?

You will be prompted to enter a phone number and then a name.

If you already had a number displayed, it will automatically be re-displayed when you select this feature.

The number will be stored in the next available SIM card location. See **Add Entry** on page 9-7 for more information.

### Message Editor?

The last message that was edited will be displayed. Press and hold **OK** to clear the message and start a new one, or modify the message displayed. See **How to Create and Edit SMS Messages** on page 9-18 for more information.

### Read Messages?

Your newest message will be displayed; you can then read, delete and edit messages as normal. See **Received Messages** on page 9-18 for more information.

### Play VoiceNotes™?

Plays the recorded VoiceNotes™. See **Using VoiceNotes™** on page 8-1 for more information.

### Mute Phone?

Temporarily turns the microphone off during a phone call. Reselect this option to resume your conversation.

### Received Calls?

Displays the first entry in the Last Calls Received list. You can scroll through the list and call the numbers as normal. See **Last Calls Received** on page 9-8 for more information.

### Divert On/Off?

Unconditional voice call diversion will be switched either on or off depending on the current setting. This will allow Fax and Data diversion to remain enabled independent of the Voice Call Diversion setting.

You must have defined a diversion number using the 'Divert All Voice Calls' option in the Call Diverting menu in order to use this feature.

You cannot switch call diverting on or off if you are outside network coverage.

## Add to Phone?

You will be prompted to enter a phone number and then a name.

If you already had a number displayed, it will automatically be re-displayed when you select this feature.

The number will be stored in the next available phone memory location. See **Add Entry** on page 9-7 for more information.

## Call Voicemail?

Your phone will make a call to your voicemail number.

You must have defined a Voicemail number in order to use this feature.

See **Call Voicemail** on page 9-18 for more information.

## Lock Now?

Immediately locks your phone, you will not be able to use your phone until the unlock code is entered. See **Phone Lock** on page 9-24 for more information.

## Adjust Ring?

This option is used to display and to set the incoming call ring tone volume.

## Switch Memory?

Switches one-touch dialling between the phone and SIM memories depending on the current setting.

## Outgoing SMS?

Your newest message will be displayed; you can then read, send, delete and edit messages as normal. See **Outgoing Messages** on page 9-19 for more information.

## Call Charge?

Displays the cost of your last chargeable call. See **Show Call Charges** on page 9-32 for more information.

## Call Timer?

Displays the duration of your last chargeable call. See **Show Call Timers** on page 9-33 for more information.

## Restrict My ID?

Your phone number will not be sent with the next attempted call; after this your phone number will be sent until you reselect this option.

## Show Time/Date?

Displays the current time and date.

## Show Credit?

Allows you to quickly display the Credit Remaining.

This will only show the credit remaining if you receive the Advice of Charge service.

## Find New Network?

Allows you to quickly search for a new network.

## Change Band?

Use this option to change the band of operation for your phone. See **Network Selection menu**, pages -28 to page 9-31 for more information.

## 10-4 Handset quick access menu

---

### Customising the Quick Access menu

You can change the features in the Quick Access menu to suit your personal preferences.

To customise the menu, you can use either the Quick Access Setup menu (see **Using Voice Activation** on page 8-2) or you can do the following:

1. Press **Menu** and scroll to the menu item you wish to change.
2. Press and hold **Menu** to access the list of features available. The currently selected feature will be displayed.
3. Scroll through the list until you find the feature you wish to store in the Quick Access menu; press **Enter**.
4. **Completed** will be displayed to confirm that the feature has been stored.

The items in the Quick Access list will appear in the following order:

- Find by Name
- Find by Location
- Add Entry to Phone
- Add Entry to SIM
- Call Voicemail
- Phone Lock Now
- Phone Mute On or Off
- Ring Volume
- Switch Memory
- Read Messages
- Outgoing Messages
- Message Editor
- Last Calls Received
- Last Call Charge
- Last Call Timer
- Restrict My ID
- Play VoiceNotes™
- Divert Voice Call
- Show Time and Date
- Credit Remaining
- Find New Network
- Change Band