

Entering the vehicle

To stop window movement during global opening when using the Smart Key, press any of the buttons on the Smart Key or operate the driver's window switch. To stop a particular window from opening, operate the relevant window switch.

Note: Global opening can be enabled/disabled via the Security/ vehicle settings menu on the touch screen. See **62, VEHICLE SETTINGS**.

DRIVE-AWAY LOCKING

Locks all the doors when the vehicle exceeds a set speed. Use of the central locking/ unlocking buttons (see **228, DRIVER CONTROLS**), will override the drive-away locking feature for the rest of a journey.

If a door is individually unlocked and opened, all doors will relock when the open door is subsequently closed.

Note: Drive-away locking and the speed at which it activates can be enabled/ disabled via the Vehicle settings menu on the touch screen. See **62, VEHICLE SETTINGS**.

STEERING COLUMN LOCK

Your vehicle is fitted with an electronic steering column lock. The column unlocks when a Smart Key is detected inside the vehicle.

If any malfunction of the steering column lock occurs, **STEERING COLUMN LOCKED** will be displayed in the Message centre. If this occurs:

1. Lock and then unlock the vehicle using the Smart Key.
2. Try again to unlock the steering column lock, by turning the steering wheel gently to the left and right while locking and then unlocking the vehicle using the Smart Key.
3. If the problem persists, seek qualified assistance immediately.

REMOTE KEY FOB CARE



To prevent accidental operation, never leave the Smart Key in the vehicle if children or animals are also left in the vehicle.



Do not expose to extremes of heat, dust, humidity or fluids. Do not leave the transmitter exposed to direct sunlight.

The emergency key blade number is recorded on an attached label, which should be peeled off and affixed to the correct area in the Service Portfolio, supplied in the literature pack. Keep the Service Portfolio safe, but not in the vehicle.


The operational range of the Smart Key varies considerably, depending on atmospheric conditions and interference from other devices.

Note: The radio frequency used by the Smart Key may be used by other devices (e.g. medical equipment). This may prevent the Smart Key from operating correctly.

REMOTE KEY FOB BATTERY REPLACEMENT

When the battery needs replacing, there will be a significant decrease in the effective range and the message **SMART KEY BATTERY LOW** is displayed in the Message centre.

To replace the battery:

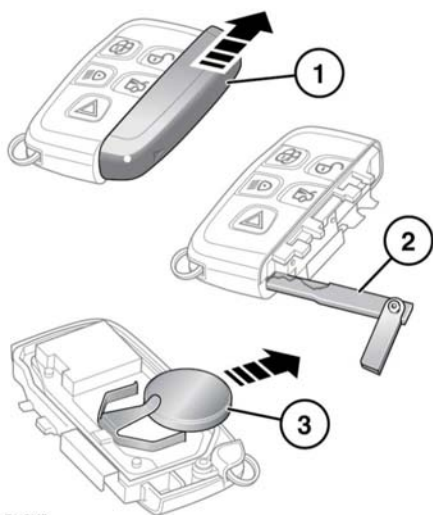

E145487

1. Slide the cover in the direction of the arrow until a click is heard. Remove the cover.
2. Use the emergency key blade to separate the Smart Key body.
3. Fit a new CR2032 type battery (available from your Jaguar Dealer/Authorised Repairer), with the positive (+) side upwards.

Note: Use only a new unused battery when replacing the used battery.

Note: Avoid touching the new battery, as moisture/oil from your fingers can reduce battery life and corrode the contacts.

Refit the parts in the reverse order, ensuring that they click securely into place.



Battery disposal: Used batteries must be disposed of correctly, as they contain harmful substances. Seek advice on disposal from your Dealer/Authorised Repairer and/or your local authority.