



X-TYPE

Voice Activated Control

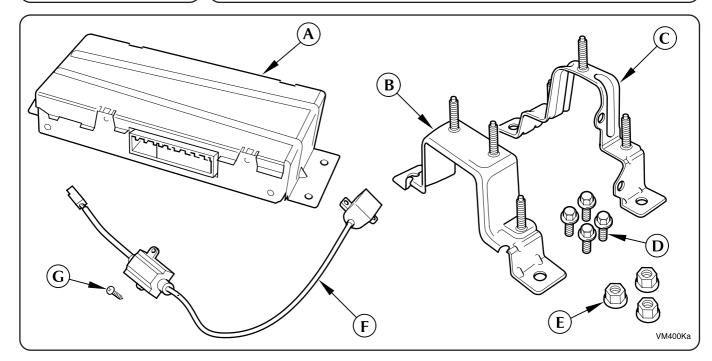

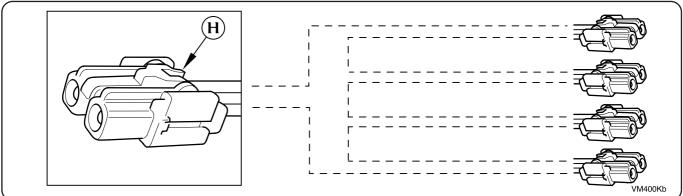

Content of kit

- A. Voice module *
- B. Bracket
- C. Bracket
- D. Bolts
- E. Nuts
- F. Microphone *
- G. Screw
- H. D²b lead *
- * Ordered separately

Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 1 of 14


SK1X43-19G418-AA

MY 2001.5



X-TYPE

Voice Activated Control

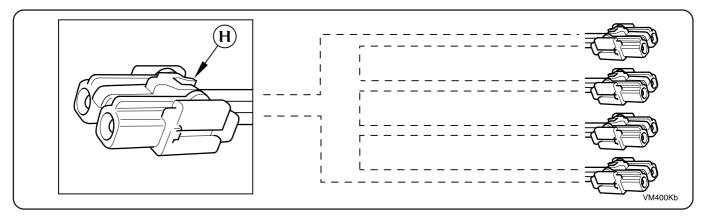

Notes:

Ensure correct optical lead supplied using matrix below before commencing work.

Locate the column which matches the vehicle specification including voice

Ensure the letter (*) is the same as the letter (*) in the d^2b lead part number.


		1X43-14B242 ?*?														
		A *	B *	B *	C*	C*	D*	D*	E*	F*	F*	G*	K*	L*	M*	N*
CD	(1)	Y			Y	Y	Y	Y	Y					Y	Y	
PHONE	(2)		Y		Y		Y		Y	Y		Y	Y	Y		
VOICE	(3)			Y		Y		Y	Y		Y	Y	Y	Y		
NAVIGATION (4)							Y	Y	Y	Y	Y	Y			Y	Y

Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 2 of 14

FITTING INSTRUCTIONS


X-TYPE

Voice Activated Control

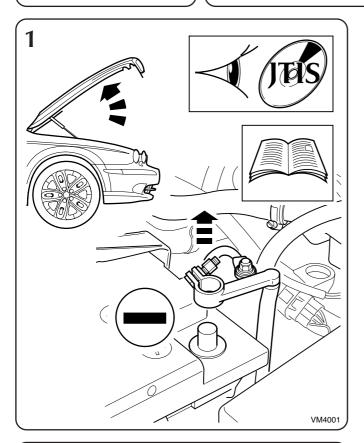


Notes:

1. Refer to J.T.I.S / Drivers Handbook to ensure correct operations are carried out, relevant to battery disconnect and reconnect.





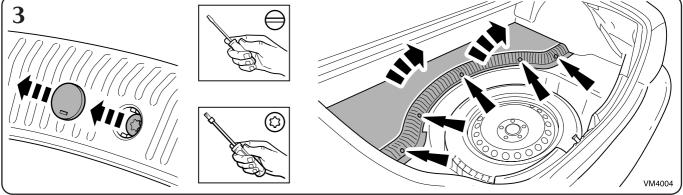


MY 2001.5

FITTING INSTRUCTIONS

X-TYPE

Voice Activated Control

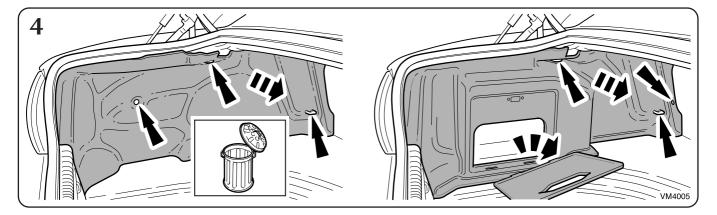

Notes:

4. If new electrical trunk trim supplied, old trunk trim can be discarded after removal.

Notes:


The $\mathsf{D}^2\mathsf{b}$ leads link any modules fitted in the trunk of the vehicle. The following instruction shows disconnecting and reconnecting all the modules that could possibly be fitted. Apply to your vehicle as necessary.


- * Ignore if not fitted.
- # Ignore if already fitted.





X-TYPE


Voice Activated Control

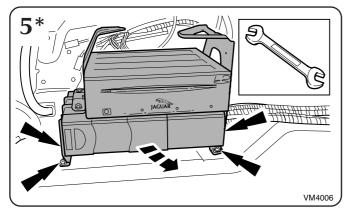









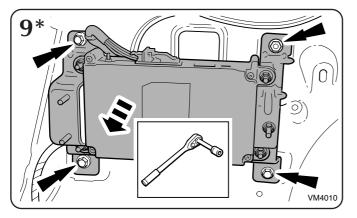



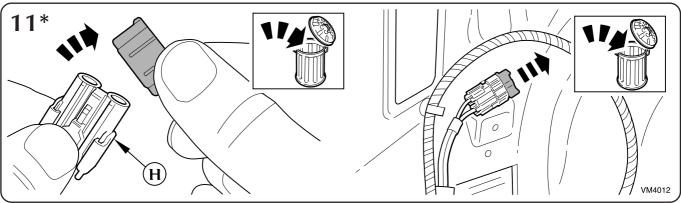


MY


2001.5





X-TYPE

Voice Activated Control

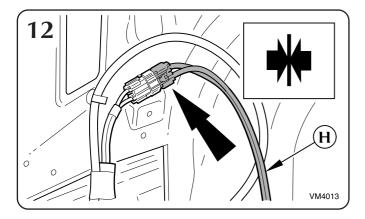

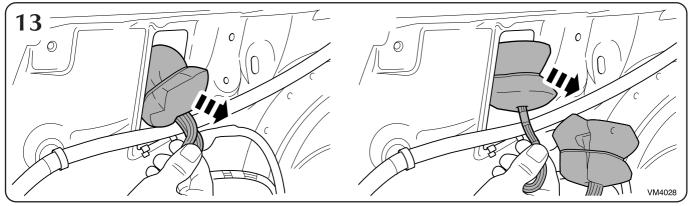

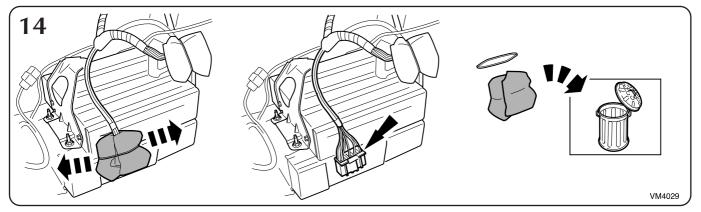




MY 2001.5

Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 6 of 14




X-TYPE


Voice Activated Control

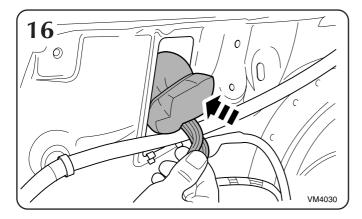

Notes

16. Foam protection must be fitted if you are replacing the telephone plug in the body hole.



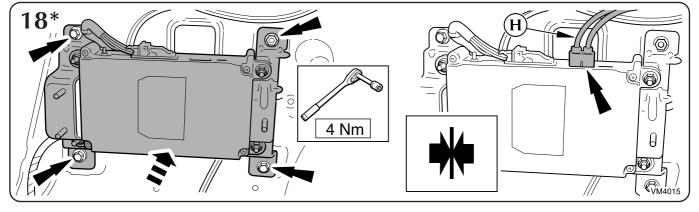


Notes:

18. If the vehicle has telephone, the brackets for voice are already fitted. Mount the voice module in front of the telephone module and discard the brackets and bolts supplied.




X-TYPE


Voice Activated Control

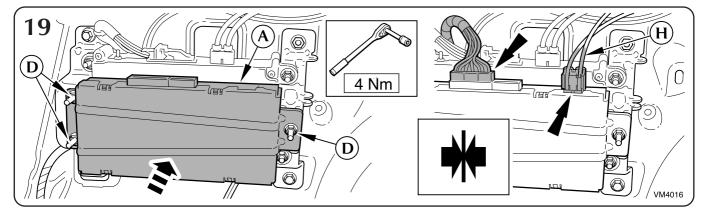


Notes:

19. Telephone module may or may not be fitted.

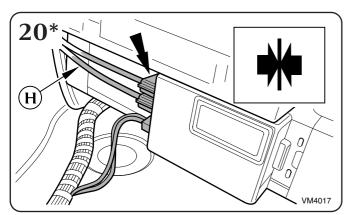



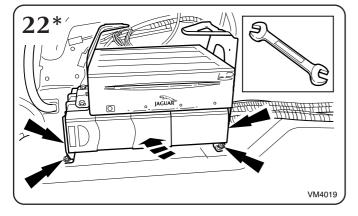


MY 2001.5

Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 8 of 14




X-TYPE


Voice Activated Control

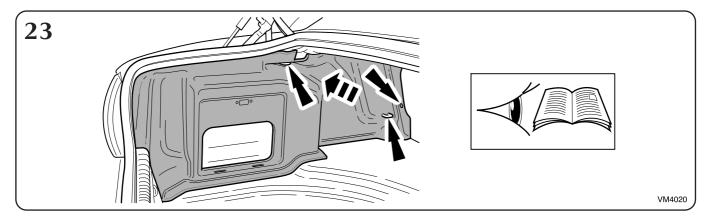


Notes:

23. If new trunk trim supplied refer to instructions for trunk modifications.

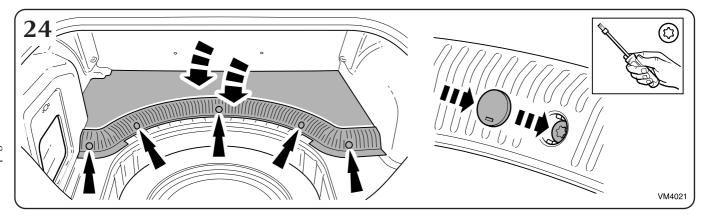







MY 2001.5



X-TYPE


Voice Activated Control





Notes:

Dependant on the vehicle specification operations may vary for fitting the microphone.

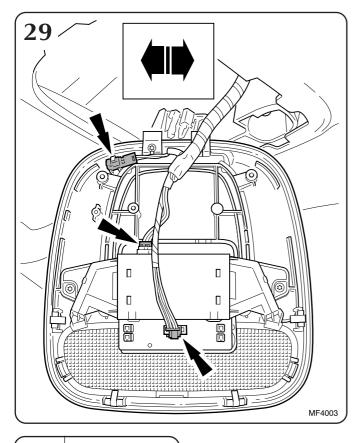

Notes:

29. Disconnect all electrical connectors to enable console to be removed from the vehicle.


Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 10 of 14

MY 2001.5

FITTING INSTRUCTIONS


X-TYPE

Voice Activated Control

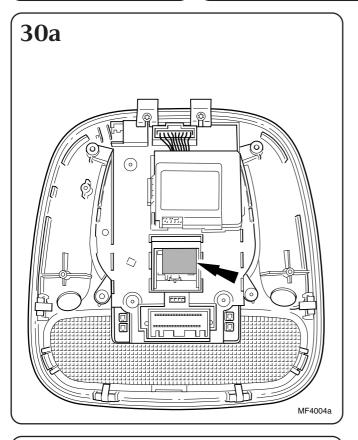

Notes:

30a. Microphone is located in area shown.

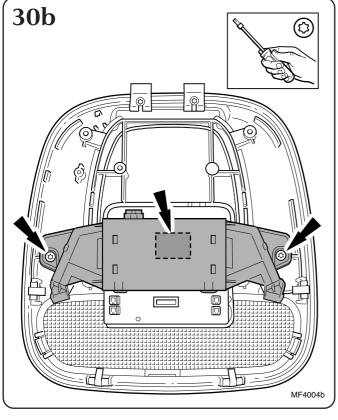


Notes:


30b. Microphone is located in area shown. It may be necessary to remove the ultra sonic alarm module in order to get access.

FITTING INSTRUCTIONS

X-TYPE

Voice Activated Control

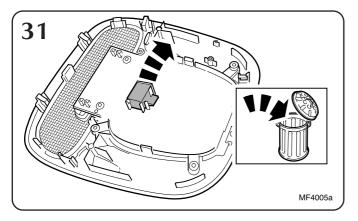

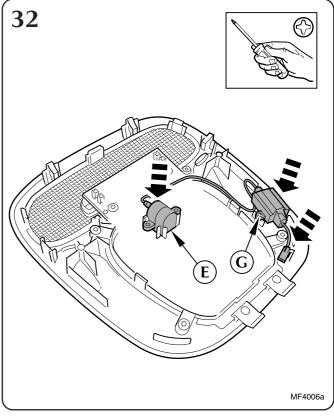

Notes:

MF4007


33. Refit the ultra sonic alarm module if fitted.

Notice No. UEV4 E 11346404 000 Date 03/04/02 Number of pages. 12 of 14




X-TYPE


Voice Activated Control

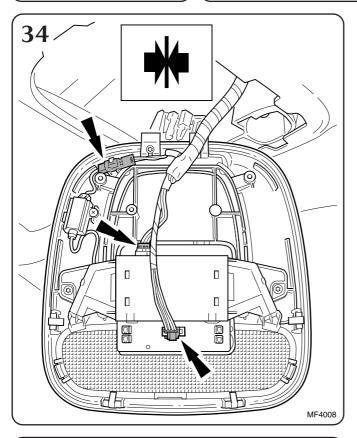

Notes

34. Connect all electrical connectors.



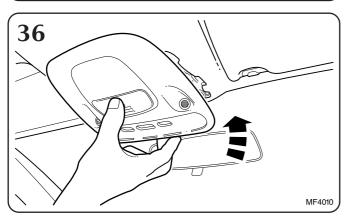


MY 2001.5




X-TYPE

Voice Activated Control

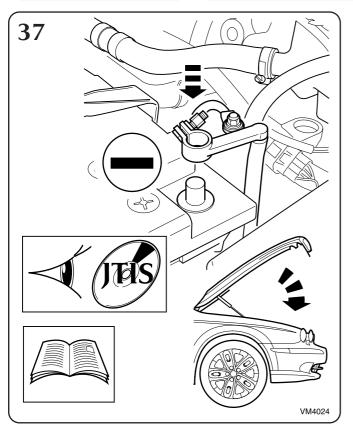

Notes

37. Refer to J.T.I.S / Drivers Handbook to ensure correct operations are carried out, relevant to battery disconnect and reconnect.



Notes:

38. Refer to WDS, dealer options, add and remove accessory.

MY 2001.5