

Jaguar recommends:

Castrol EDGE Professional




CHECKING THE COOLANT LEVEL

- ❗ Running the engine without coolant will cause serious engine damage.
- ❗ If persistent coolant loss is noticed, seek qualified assistance immediately.


The coolant level in the expansion tank should be checked at least weekly (more frequently in high mileage or severe operating conditions). Always check the level when the system is cold.

Ensure the coolant level is maintained between the level indicator marks, as shown in the illustrations.

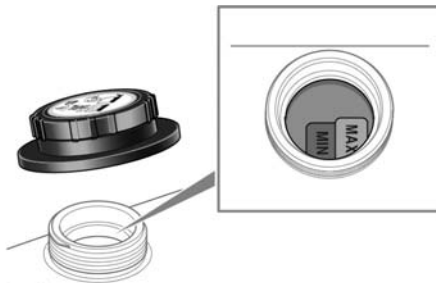

E132660

Diesel engines

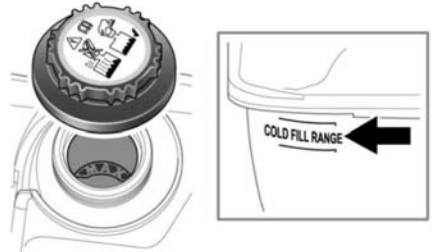

E132661

Petrol engines

If the message **LOW COOLANT LEVEL** is displayed in the Message centre, stop the vehicle as soon as safety permits and top-up the coolant reservoir with the recommended antifreeze/water mix.

If the message is **ENGINE OVERHEATING**, pull off the carriageway and allow the engine to idle for 5 minutes and then switch off the ignition for 10 minutes. Switch on the engine and provided that the warning does not occur, continue your journey, avoiding harsh acceleration. Seek qualified assistance as soon as possible.

TOPPING UP THE COOLANT

- ⚠ **Never remove the filler cap when the engine is hot.**
- ⚠ **Antifreeze is highly inflammable. Do not allow antifreeze to come into contact with naked flames or other sources of ignition (e.g. a hot engine) - a fire may result.**
- ⚠ **Unscrew the filler cap slowly, allowing the pressure to escape before removing completely.**