


Adaptive cruise control

Note: When Intelligent stop/start is fitted, it may operate during a Queue assist stop. Press the accelerator pedal for longer than normal to restart the engine and move off.

DETECTION BEAM ISSUES

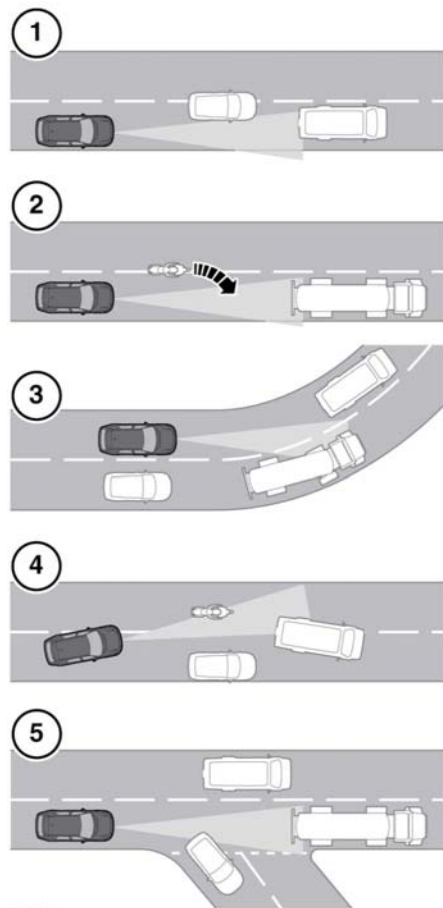

E142911

Detection issues can occur:

1. When driving on a different line to the vehicle in front.
2. When a vehicle edges into your lane. The vehicle will only be detected once it has moved fully into your lane.
3. When going into and coming out of a bend.
4. When moving around a stationary vehicle. This may cause uncertainty as to which vehicle should be followed.
5. When the vehicle ahead turns out of your lane. This may cause uncertainty as to which vehicle should be followed.

In these situations, ACC may operate unexpectedly. The driver should stay alert and intervene, if necessary.

ACC MALFUNCTION

If a fault occurs while ACC or Follow mode is operational, ACC will switch off and cannot be used until the fault is cleared. The message **DRIVER INTERVENE** is displayed briefly in the Message centre and is then replaced by the message **CRUISE NOT AVAILABLE**.

If a fault with ACC, or any related system occurs at any other time, the message **CRUISE NOT AVAILABLE** will be displayed. It will not be possible to activate ACC in any mode.

Accumulations of dirt, snow, or ice on the radar sensor or cover may inhibit ACC operation. Fitting of a vehicle front protector or metallised badges may also affect ACC operation.

If this occurs in ACC/Follow mode, the audible alarm sounds and the message **DRIVER INTERVENE** is displayed briefly. The message **RADAR SENSOR BLOCKED** will then be displayed.

Note: The same messages may also be displayed while driving on open roads with few objects for the radar to detect.