





Tire pressure monitoring system (TPMS)


TIRE PRESSURE MONITORING SYSTEM

-  TPMS provides a low pressure warning and does not re-inflate your tires. Tire pressures should be checked regularly using an accurate pressure gauge when the tires are cold.
-  TPMS can NOT register damage to a tire. Regularly check the condition of your tires.
-  When inflating tires, care should be taken to avoid bending or damaging the TPMS valve. Always make sure of correct alignment of the inflation head to the valve stem.
-  To avoid damage to TPMS valves, it is recommended not to use rigid tire inflation wands. This is to avoid the risk of excess leverage and sideways pressure on the valve.

Note: Non-approved accessories may interfere with the system. If this occurs, **TIRE PRESSURE MONITORING FAULT** is displayed in the Message center.

Note: Different types of tire may affect TPMS performance. Always replace tires in accordance with recommendations.

TPMS constantly monitors the tire pressure in each wheel except for the temporary use spare tire (when fitted) which is not monitored.

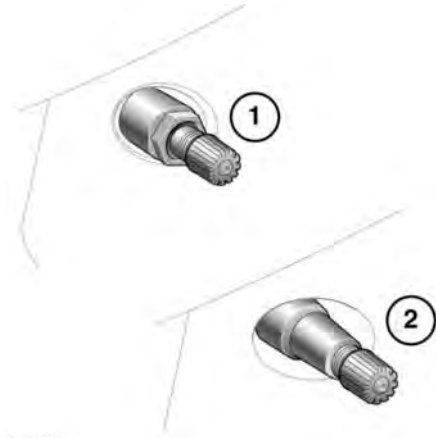

E132513

Wheels fitted with TPMS can be visually identified by the external metal lock nut and valve (1). All Jaguar non-TPMS wheels have a rubber valve fitted (2).

Each tire, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label (If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires).

As an added safety feature, your vehicle has been equipped with a Tire Pressure Monitoring System (TPMS) that illuminates a low tire pressure telltale when one or more of your tires is significantly under-inflated.

Tire pressure monitoring system (TPMS)

Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability.

Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale.

Your vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly.

The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists.

When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended. TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly. Always check the TPMS malfunction telltale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

TIRE PRESSURE CHECK

The Instrument panel can be used to display the vehicle's tire pressures. The tire pressure figures can be accessed via **Tire Pressures** and the **Recommended Pressures** menus. See **44, INSTRUMENT PANEL MENU**.

***Note:** The tire pressure units can be configured to display as either bar, psi, or kPa via the **Tire Pressures** and the **Units** menu.*

When selected, the last known tire pressures will be displayed, alongside the recommended cold tire pressures (in brackets).

***Note:** If any of the wheels or tires have been removed, the displayed tire pressures may not be valid. Drive the vehicle for at least 15 minutes in order to re-calibrate the system.*

RECOMMENDED TIRE PRESSURE LOOK-UP

The Instrument panel can be used to display the recommended cold tire pressures for your vehicle. The tire pressure look-up table can be accessed via **Tire Pressures** and the **Recommended Pressures** menus. See **44, INSTRUMENT PANEL MENU**.

Depending on the specification of your vehicle, a number of different values may be displayed to reflect different driving conditions, for example, high speed driving or for a heavily laden vehicle.

Tire pressure monitoring system (TPMS)

TEMPORARY USE SPARE WHEEL AND TIRE CHANGE

If the temporary use spare wheel is fitted, the system will automatically recognize the change in wheel positions. After approximately 10 minutes of driving above 18 mph (25 km/h), the message **FRONT[REAR] RIGHT[LEFT] TIRE PRESSURE NOT MONITORED** will be displayed, accompanied by illumination of the warning lamp.

The warning lamp will first flash and then illuminate continuously. Extended use of the temporary use spare wheel will trigger the message **TIRE PRESSURE MONITORING SYSTEM FAULT**.

This TPMS display sequence will be activated at every ignition cycle until the temporary spare wheel is replaced by a full-size road wheel with a TPMS sensor fitted.

***Note:** If in use, always replace the temporary spare wheel before having a TPMS fault investigated.*

TYPE APPROVAL NUMBERS

United States of America

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Canada

This device complies with Industry Canada Standard IC - RSS-210: Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device.

***Note:** Changes or modifications not expressly approved by the manufacturer could void the user's authority to use the equipment.*

The TPMS radio frequency approval numbers for the USA and Canada are:

USA FCC ID:	KR5S120123
	KR5S180052021
	5WK49097
Canada IC:	267T-S120123
	7812D-S180020A
	267T-5WK49097